Donaldson.

DOWNFLO® AMBIENT TOWER WELD FUME EXTRACTOR

INTELLIGENT DESIGN DUCTLESS INSTALLATION ULTRA-WEB® FILTER MEDIA



CHALLENGING ENVIRONMENTS CALL FOR UNIQUE SOLUTIONS

Today's metal fabrication operations need innovative solutions to help keep up with new applications and increasing production demands. To accommodate new opportunities, you need welding equipment and supporting tools that are flexible enough for changing layouts and workflows.



The Donaldson[®] Torit[®] Downflo[®] Ambient (DFA) tower weld fume extractor is a powerful ambient collector developed specifically to help address certain challenges in your welding operation. The collector's ductless installation is helpful for facilities challenged by overhead space limitations or frequent layout changes.

The DFA is designed to collect fumes from the welding field as they rise. The collector then returns filtered air near floor-level to assist with air circulation. Multiple extractors can be placed throughout the manufacturing area to account for a wide variety of materials, piece sizes, and various weld locations requiring a different set-up.

APPLICATIONS & INDUSTRIES



General Fabrication



Automotive



Heavy Machinery



Welding Schools

WE KNOW FILTRATION

Donaldson is a global provider of filtration solutions for manufacturing industries. Our advanced technology, extensive portfolio of filtration products, and unrivaled customer support help manufacturers meet their clean air needs and reduce long-term costs of operation. Our experience with worldwide installations makes us uniquely qualified to work with you providing solutions that support metal fabrication operations.

POWERFUL PERFORMANCE IN A PRACTICAL PACKAGE

EASY INSTALLATION

Prewired and integrated control panel control panel. No ductwork or hoods required.

24/7 CONTINUOUS DUTY

Reliable operation when manufacturing is in process.


SUPPORTS NATURAL CIRCULATION PATTERN

Efficiently collects weld fumes as they rise toward the ceiling.

ENERGY EFFICIENT

Superior pulse cleaning reduces compressed air consumption.



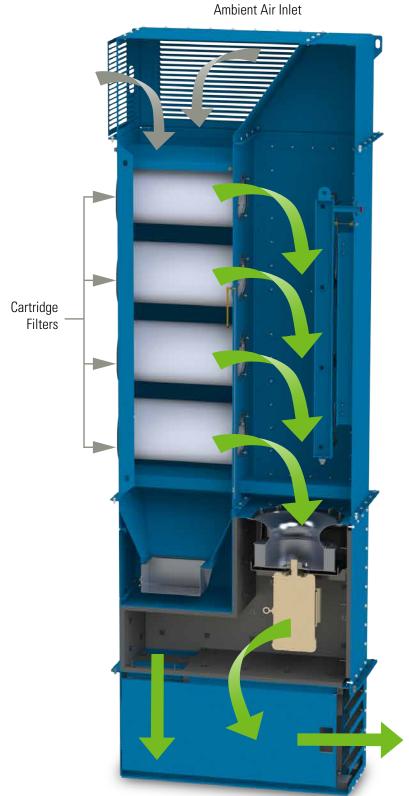

EASY MAINTENANCE

Tool-free hinged access doors allow for quick filter changeouts.

INTEGRATED CONTROLS

Intuitive display provides clear machine management.

EFFICIENT USE OF SPACE

Footprint allows for flexibility on the production floor.

CONVENIENT DUST DRAWER

Easy-to-handle receptacle makes removal uncomplicated.

Clean Air Outlet


OPERATION CONDITIONS

The Downflo Ambient tower weld fume extractor represents a simple solution to a challenging problem: effective weld fume extraction without duct work or hoods. The DFA gives you the ability to reorganize your weld stations or work areas without moving your weld fume extraction equipment.

DFA-8 MODEL					
Fan Horsepower	15 HP				
Fan Horsepower Voltage Options	208V, 230V, 460V, 575V				
Control Panel Voltage Options	208V, 230V, 460V, 575V				
Solenoid Voltage	110 VAC 60 HZ				
Housing Construction	10 Gauge (Primary Construction)				
Housing Rating	-13" (-330 mm) of H ₂ O				
Seismic Spectral Acceleration	S/S=1.5 & S/1=0.6 Site Class D				
Maximum Operating Temperature	120° F (49° C)				
Compressed Air Required	9.75 SCFM @ 60 PSIG (16.5 M³/Hr @ 4.1 Bar)				
Number of Valves	8				

ULTRA-WEB® PERFORMANCE MEDIA

Proven and proprietary Ultra-Web[®] media technology delivers long filter life, clean air and cost savings over the life of your collector. Made with an electrospinning process that produces a very fine, continuous, resilient fiber of 0.2-0.3 micron in diameter, Ultra-Web forms a permanent fine fiber web with very fine interfiber spaces that trap dust on the surface of the media.

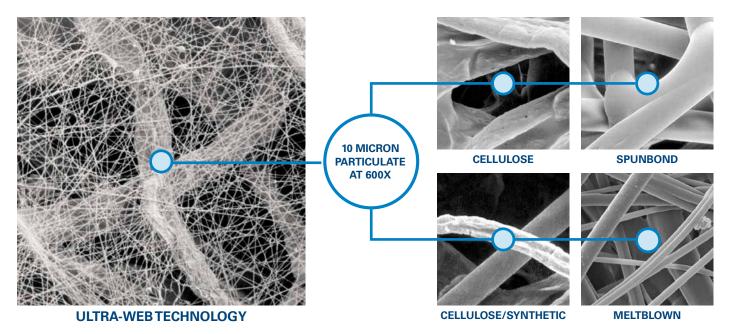

B

DIMENSIONS & SPECIFICATIONS

DFA-8 MODEL				
Airflow Clean Filters [0.5" (13 n	7,000 CFM (11,893 M ³ /Hr)			
Airflow Dirty Filters [5.0" (127 mm) wg]		6,100 CFM (10,364 M ³ /Hr)		
Number of Elements	8			
Filter Media (ft²)	2,032 ft² (189 m²)			
Number of Valves	8			
Dimensions				
Α	1	B C		
in mm	in	mm	in	mm
48.1 1220.7	169.9	4314.2	61.4	1559.6

Front View

Side View

Ż

С

ත්

STANDARD FEATURES & AVAILABLE OPTIONS

COLLECTOR DESIGN	STD	OPT
Mild Steel Construction	X	
Integral Power Pack	X	
Integral Inlet	X	
Sprinkler Taps	X	
Hinged Access Covers	X	
Integral Exhaust Silencer	X	
5 Gallon Dust Drawer	X	
Solid Panel Outlet Covers		X
Sprinkler Heads		X
CARTRIDGE FILTERS		
UWFR	x	
Other Media Options		X

PAINT SYSTEM	STD	OPT			
Textured Multi-Coat Paint Finish with 2,000 Hour Salt Spray Performance	x				
Custom Color		X			
Premium Duty		X			
ELECTRICAL CONTROLS					
Standard Panel with Delta P Controller	X				
Enhanced Panel with High Temperature Sensor and Alarm		x			
WARRANTY					
10-Year Warranty	X				



shop.donaldson.com



P034303-016-436

Ultra-Web® filters

are one of over 100,000 replacement filters and parts Donaldson has in-stock and ready to ship today. Not tomorrow.

Today.

Find these filters and thousands more at Shop.Donaldson.com

Important Notice: Many factors beyond the control of Donaldson can affect the use and performance of Donaldson products in a particular application, including the conditions under which the product is used. Since these factors are uniquely within the user's knowledge and control, it is essential the user evaluate the products to determine whether the product is fit for the particular purpose and suitable for the user's application. All products, product specifications, availability and data are subject to change without notice, and may vary by region or country.



Donaldson Company, Inc. Minneapolis, MN

donaldsontorit.com • shop.donaldson.com

North America Email: donaldsontorit@donaldson.com Phone: (USA): +1-800-365-1331 • (MX): +1-800-343-36-39 Australasia

Email: marketing.australia@donaldson.com Phone: +61-2-4350-2000 Toll Free: (AU) +1800-345-837 • (NZ) +0800-743-387 China Email: info.cn@donaldson.com Phone: +86-400-820-1038

Donaldson Europe B.V.B.A. Email: IAF-europe@donaldson.com Phone: +32-16-38-3811

India Email: info.difs@donaldson.com Phone: +91-124-4807-400 • +18001035018

Japan Email: jp-ndl.ifsweb@donaldson.com Phone: +81-42-540-4112 Korea Email: iaf-kr@donaldson.com Phone: +82-2-517-3333

Latinoamerica Email: IndustrialAir@donaldson.com Phone: +52-449-300-2442

South Africa Email: SAMarketing@donaldson.com Phone: +27-11-997-6000

Southeast Asia Email: IAF.SEA@donaldson.com Phone: +65-6311-7373

Toll Free: (AQ) + 1800-345-837 • (NZ) + 1800-743-387 Prome: +81-42-540-4112 Prome: +85 F118181 ENG (01/23) Downflo Ambient Tower Weld Fume Extractor ©2022-2023 Donaldson Company, Inc. Donaldson, Torit, Downflo, Ultra-Web, and the color blue are marks of Donaldson Company, Inc. All other marks belong to their respective owners.