



Donaldson Delivers

DONALDSON EXHAUST ACCESSORIES

for Medium & Heavy-Duty vehicles and equipment


Clamps • Tubing / Connectors • Stack Caps • Sleeves & Wraps




Donaldson offers a wide selection of standard mufflers and exhaust components for diesel powered vehicles and equipment that operate in a variety of conditions.

CLAMPS


Type of Joint Type of Clamp to Apply




Stepped SealClamp™



V-Band Clamp



Flat band SealClamp™




U-Bolt Clamp



Stepped SealClamp™
1 - Bulk Pack of 48

Stepped SealClamp™

O.D. Pipe	
in. (mm)	Stainless
2.50 (64)	X007829
3.00 (76)	X007830
3.50 (89)	X007831
4.00 (102)	X007784
5.00 (127)	X007785
5.00 (127)	X007785-48'
6.00 (152)	X009076



Flat Band SealClamp™

Flat Band SealClamp™

O.D. Pipe	
in. (mm)	Stainless
2.00 (51)	X004536
2.25 (57)	X004537
2.50 (64)	X004476
2.75 (70)	X004538
3.00 (76)	X004478
3.50 (89)	X004480
4.00 (102)	X004482
4.50 (114)	X004962
5.00 (127)	X004484
6.00 (152)	X004539

May be used for butt-style joints in light duty applications.



**U-Bolt Clamp:
Double, Flat Band**

O.D. Pipe	
in. (mm)	Zinc
3.00 (76)	P206600
3.50 (89)	P206601
4.00 (102)	P206602
5.00 (127)	P206603
6.00 (152)	P207596

V-BAND CLAMPS




- Used to connect vehicle exhaust pipe flange to turbo or engine manifold
- May also hold the turbo housing flanges
- Built to withstand high temperatures produced by heavy-duty engines/turbos
- Manufactured to the highest tolerances and meet or exceed OEM specifications for material and quality standards.


V-Band Clamps for Pipes and Turbo Housing Flanges

CAT	Part Number	Nominal Diameter in. (mm)	V-Insert Sections		
			-- A -- in. (mm)	-- B -- in. (mm)	-- C -- in. (mm)
3406, 3406B, 3176	P206607	5.88 (149)	0.40 (10)	0.28 (7)	0.88 (22)
3176T	P222018	4.75 (121)	0.40 (10)	0.28 (7)	0.88 (22)
CUMMINS					
B Series #3903652	J009618	3.21 (82)	0.26 (7)	0.14 (4)	0.75 (19)
C Series	P222017	4.13 (105)	0.26 (7)	0.14 (4)	0.75 (19)
V555, V902, V903	J009612	3.88 (99)	0.40 (10)	0.28 (7)	0.88 (22)
DETROIT DIESEL					
6-71T, 12V71, 8.2N, 8.2T	P206606	4.81 (122)	0.21 (5)	0.28 (7)	0.88 (22)
6V53, 6V71, 6V92, 8V92	P206604	3.82 (97)	0.21 (5)	0.28 (7)	0.88 (22)
8.2N, #2069773	J009611	4.06 (103)	0.24 (6)	0.28 (7)	0.88 (22)
8V71T	P213191	5.81 (148)	0.21 (5)	0.28 (7)	0.88 (22)
8V71T, 16V-71, 16V92T, 6V92, 8V92	P210110	5.25 (133)	0.21 (7)	0.14 (4)	0.75 (19)
8V92, 8V71, 4-53, 6-71	P206605	4.50 (114)	0.21 (5)	0.28 (7)	0.88 (22)
Series 60	P206607	5.88 (149)	0.40 (10)	0.28 (7)	0.88 (22)
IH					
DT466	J009613	4.33 (110)	0.21 (5)	0.28 (7)	0.88 (22)
MACK					
48RU2341, 4ME21409	J009614	4.61 (117)	0.16 (4)	0.28 (7)	0.75 (19)

Cross Section

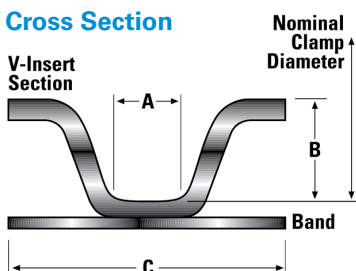

MUFFLER BODY CLAMPS



W-Foot Body Bands

-- A -- in. (mm)	-- B -- in. (mm)	-- C -- in. (mm)	Part No.
6.00 (152)	3.75 (95)	3.75 (95)	M002117
6.62 (168)	4.00 (102)	4.00 (102)	M002118
8.50 (216)	5.00 (127)	5.00 (127)	M002119
9.00 (229)	5.50 (140)	5.50 (140)	M002120
10.08 (256)	6.00 (152)	6.00 (152)	M002121
11.06 (281)	6.50 (165)	6.50 (165)	M002122
11.84 (301)	7.00 (178)	7.00 (178)	M002123

FLEX & FLEX TUBING

10ft. Flex Tubing



Flex Tube (10ft) 3m length

O.D. in. (mm)	Stainless
2.00 (51)	P226151
2.50 (64)	P226152
3.00 (76)	P226144
3.50 (89)	P226145
4.00 (102)	P226146
5.00 (127)	P226147
6.00 (152)	P226153

Standard Cut to Length



Standard Cut to Length Flex

O.D. in. (mm)	Overall Length ¹ in. (mm)	Stainless
3.00 (75)	24.00 (610)	J240004
3.50 (89)	24.00 (610)	J024850
4.00 (102)	36.00 (914)	J034673
5.00 (127)	36.00 (914)	J034674
6.00 (152)	30.00 (762)	P206559

1 - Measured full extended

RESONATORS



- Installs in the exhaust system and provides an additional 2 to 3 dBA exhaust noise reduction
- Straight-through design does not increase back-pressure
- Alumined steel with both ends I.D. slotted
- Common dimensions for both models:
Body Diameter 9" (229mm)
Body Length 10" (254mm)
Overall Length 16.5" (419mm)

I.D. / O.D. in. (mm)	Part No.
4.00 (102)	M090362
5.00 (125)	M090072

HEAT SLEEVES



Slips on to 3" to 5" dia. pipe

Length	Part No.
12"	P235764
18"	P235765
24"	P235766

HEAT WRAP



2" wide roll, easy to install

Length	Part No.
2' x 50' roll	P235767

SLEEVE & WRAP CLAMPS



Wrap clamps make installation easy.

Length	Part No.
2 PC of 18" Long Clamp	P235768
12 PC of 18" Long Clamp	P235769

INTAKE TUBING



Intake Straight Tubing (10ft) 3m length

O.D. in. (mm)	Aluminium for intake
3.00 (76)	P224684
4.00 (102)	P207367
5.00 (127)	P206849
5.50 (140)	P207368
6.00 (152)	P206850
7.00 (178)	P206851
8.00 (203)	P207369

16 gauge

STACK CAPS

P270837 - Chrome




P270539 - Zinc Plated



O.D. Pipe in. (mm)	Zinc	Chrome
	Plated	
1.50 (38)	P270530	
1.75 (44)	P270531	
2.00 (51)	P270532	
2.25 (57)	P270533	
2.50 (64)	P270534	
2.75 (70)	P270535	
3.00 (76)	P270536	P271507
3.50 (89)	P270538	P271508
4.00 (102)	P270539	P270837
4.50 (114)	P270540	
5.00 (127)	P270541	P270838
5.50 (140)	P270542	
6.00 (152)	P2705	P271511

FLARED CONNECTORS

Flared Connectors - All 16 ga. Aluminised steel

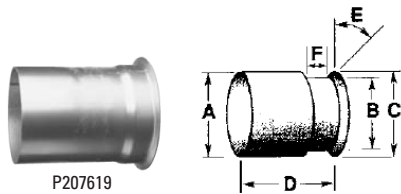

P207619

O.D. -- A -- in. (mm)	I.D. -- B -- in. (mm)	O.D. -- C -- in. (mm)	-- D -- in. (mm)	E	-- F -- in. (mm)	Flared Connector	V-Band Clamp	Application
3.00 (76)	3.02 (77)	3.62 (92)	4.00 (102)	22°	0.75 (19)	P207619	P206604	DD 6V 71
3.50 (89)	3.63 (92)	4.25 (108)	4.00 (102)	22°	0.75 (19)	P207581	P206605	8V-71-VT-555
4.00 (102)	4.02 (102)	4.75 (121)	4.00 (102)	22°	0.75 (19)	P207620	P206606	6 71-12V 71



P207582

O.D. -- A -- in. (mm)	I.D. -- B -- in. (mm)	O.D. -- C -- in. (mm)	-- D -- in. (mm)	E	-- F -- in. (mm)	Flared Connector	V-Band Clamp	Application
4.00 (102)	3.63 (92)	4.25 (108)	3.81 (97)	22°	0.75 (19)	P207582	P206605	8V 71



P207568, P207567, P207566


O.D. -- A -- in. (mm)	I.D. -- B -- in. (mm)	O.D. -- C -- in. (mm)	-- D -- in. (mm)	E	-- F -- in. (mm)	Flared Connector	V-Band Clamp
3.50 (89)	3.52 (89)	4.19 (106)	4.75 (121)	45°	2.12 (54)	P207568	P206605
4.00 (103)	4.02 (102)	4.70 (119)	4.75 (121)	45°	2.50 (64)	P207567	P206606
5.00 (127)	5.02 (128)	5.70 (145)	4.75 (121)	45°	3.00 (76)	P207566	P206607



J009629




P206614



1 - I.D. Dimension
2 - O.D. Dimension
3 - Adapter has pyrometer fitting

I.D. / O.D. -- A -- in. (mm)	O.D. -- C -- in. (mm)	-- D -- in. (mm)	E	Flared Connector	V-Band Clamp
3.00 (76) ¹	3.75 (95)	1.50 (38)	20°	P206612	P206604
	3.92 (100)	2.25 (57)	20°	J009479	J009611
3.50 (89) ¹	4.19 (106)	1.50 (38)	22°	P206613	
3.50 (89) ²	4.29 (109)	1.50 (38)	22°	J009391	P206605
4.00 (102) ¹	4.75 (121)	1.50 (38)	22°	P206614	P206606
	5.50 (140)	5.25 (133)	45°	J009393	
5.00 (127) ²	5.69 (145)	3.00 (76)	22°	P206615	P206607
	5.86 (149)	5.00 (127)	20°	J009629 ³	



P207584

Lipped Flange

O.D. -- A -- in. (mm)	I.D. -- B -- in. (mm)	O.D. -- C -- in. (mm)	-- D -- in. (mm)	E	Flange	V-Band Clamp	Application
5.01 (127)	4.25 (108)	4.80 (122)	1.94 (49)	20°	P207584	P210110	Air Research Turbo

For a comprehensive listing of exhaust components and muffler products, visit www.donaldsontoolbox.com.au



Donaldson Australasia Pty Ltd
PO Box 153, Wyong NSW 2259

Freecall: 1800 345 837
Ph: +61 2 4350 2000
Fax: +61 2 4351 2036

Donaldson New Zealand
PO Box 14-770, Panmure 1741 Auckland

Ph: +64 9 579 2790
Fax: +64 9 579 0322

Brochure No. F111611 (01/18)
© 2018 Printed in Australia. All rights reserved. Donaldson Company, Inc. reserves the right to change or discontinue any model or specification at any time and without notice.

www.donaldson.com